

MANUAL CONTROL




In its simplest form manual control offers the ability to switch the luminaires on or off by switching the live supply. As luminaires become more intelligent, the variety of manual control options also increase.

Luminaires with DALI control gear have the ability to be dimmed or turned on and off via a low voltage control signal. A separate 2 core signal cable must be wired between the control device and the luminaires. It is important to note that when a luminaire is turned off via DALI there is still a live mains connection present, the control signal does not switch the mains.

Eco Sport provides simple light level control with three programmable preset levels. The unit will also turn luminaires on and off without the need for separate mains switches.



Eco Touch provides convenient and flexible control of lighting in small offices and meeting rooms. ECO-Touch is a sophisticated but simple touch sensitive controller providing on, off and dimming control of luminaires fitted with DALI drivers (suffixed **A**).

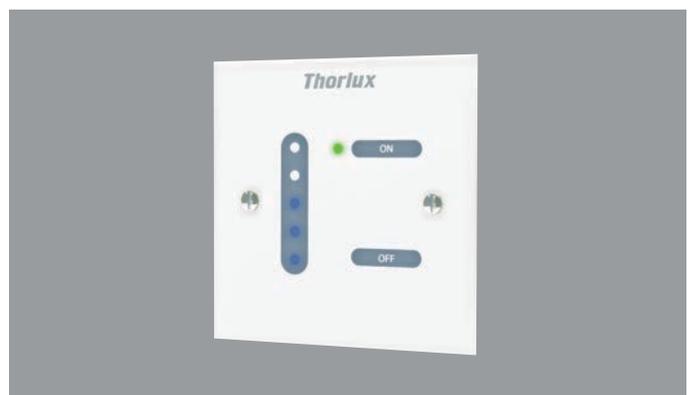

Many DALI luminaires can be wired to a push-to-make retractable switch to control dimming and on/off, this process is commonly referred to as Switch Dim (dependent on gear manufacturer this can also be referred to as "Touch&Dim"). This system involves connecting the live supply through the switch to a DALI terminal on the luminaire, the other DALI terminal is connected to neutral. A short press of the switch will turn the luminaire on or off, a long press will dim or brighten. It is important to note that not all DALI drivers support this function, please check compatibility with the technical department.