Strike M

Track-mounted adjustable spotlights



Strike M is a stylish track-mounted spotlight with discreet in-track control gear, perfectly suited for display and retail applications.

The adaptable design allows interchangeable low-glare optics, which are available in either narrow (22°), wide (33°), or flood (54°) beams, providing a smooth distribution and reducing spill light.

Strike M boasts the same great features as the Strike S, including CRI90 LEDs for excellent colour rendition, 3000 K and 4000 K options as standard, and the ability to be rotated 350° azimuth and 90° vertically for a full range of movement. For use with the Track system.

Applications: display and feature, retail, reception areas, hospitality, art galleries, museums, and libraries.

- Die-cast aluminium body
- TM66 score of 2.5 - LIA/CIBSE certification scheme TSD-012 verified
- 350° azimuth and 90° vertical adjustment
- Low glare optical control
- Optimised beam distribution using lens technology for reduced spill light
- Fitted with CRI 90 LEDs, suitable for retail applications
- Suitable for installation into Global track

IP20 **Up to 123.1 LL/CW** **TM66 circularity score 2.5**

Specification

Mounting	**Track**	IP rating	**IP20**

Sustainability

TM66 circularity score	**2.5**

Lighting

Distribution	**22° beam - Narrow** **33° beam - Wide** **54° beam - Flood**	Lumen output	**1,900 lm - 3,200 lm**
Efficacy	**Up to 123.1 LL/CW**		

Strike M

Power

LED power	**15 W - 22 W**	Circuit power	**18 W - 26 W**

Construction

Housing	**Die-cast aluminium body**	Finish	**Full polyester powder coat**
Body colour	**Black (RAL 9005)** **White (RAL 9016)**	Optical assembly	**One-piece interchangeable acrylic lens and reflector optic**


LED characteristics

CRI	**90+**	Colour temperature	**3000 K** **4000 K**
Rated life (hours)	**67 K - L80/B10**	Driver efficiency	**>85%**
Replaceable light source	**Yes**	Power factor	**>0.95**
MacAdam ellipse	**3 Step**	Flicker metric	**IEC TR 61547-1: PstLM ≤1.0 / SVM ≤0.4**

Compliance

UKCA	**Yes**	CE	**Yes**
Energy efficiency class	**This product contains a light source of energy efficiency class C** **This product contains a light source of energy efficiency class D**		

Dimensions

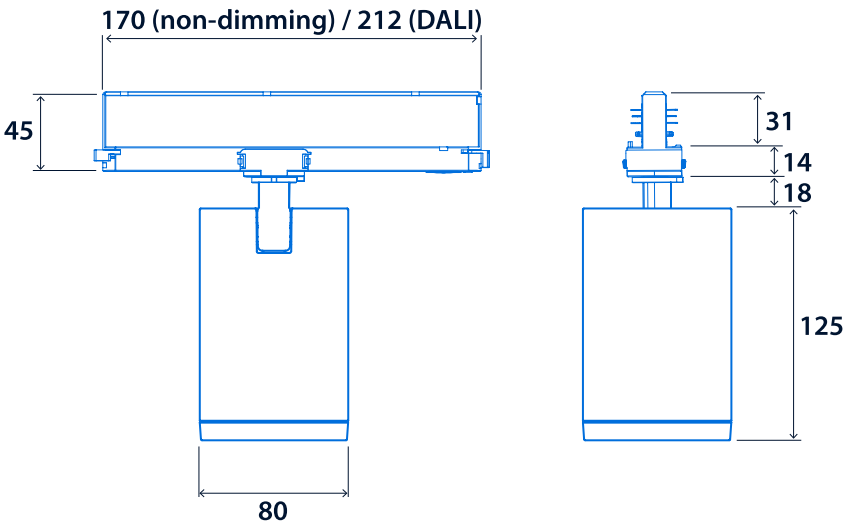

Strike M

Range

Product	Size	LED power	Mounting	Distribution	Colour temperature	Body colour	Lighting control system
SK Strike	**M** 80 mm dia.	**15** 15 W **19** 19 W **22** 22 W	**T** Track	**N** 22° - Narrow **W** 33° - Wide **F** 54° - Flood	**3** 3000 K **4** 4000 K	**W** White **B** Black	**A** Dimming (DALI) **L** Non-dimming

E.g. **SKM15TN3WA** = 80 mm dia. / 15 W / Track mounted / Narrow - 22° / 3000 K / White body / Dimming (DALI)

Spares

Product code	Description	Weight
SKM20890	Front trim - White	0.09 kg
SKM20891	Front trim - Black	0.09 kg
SKM20892	22° Narrow Optic	0.08 kg
SKM20894	33° Wide Optic	0.08 kg
SKM20895	54° Flood Optic	0.08 kg


Track mounted non-dimming in white


Track mounted DALI dimming in black


Narrow optic - 22° beam


Wide optic - 33° beam


Flood optic - 54° beam

Click or scan here

View Strike M variants using our online filtering tool



Information is correct as of 02 Nov 2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.