Zenith-M

Ceiling-mounted adjustable spotlights



Like its larger sibling, the efficient Zeneth-M is a ceiling-mounted LED display luminaire with integral control gear.

Zenith-M is designed for absolute flexibility and can be adjusted through 300° azimuth and 180° vertical. It is available in 14 W or 20 W (30° or 38°) beam versions. CRI 90 LEDs with enhanced R9 value levels ensure vivid, crisp and enriched colour quality, making it a great choice for attractive display lighting in a range of environments.

Applications: office, retail, reception areas, restaurants, and hospitality areas.

- 30° and 38° beam angle versions
- 355° azimuth adjustment
- 180° vertical adjustment
- Integral electronic control gear
- Can be supplied pre-wired with a purpose made 1 m connection lead for plugging directly into the Smart Hub
- Fitted with CRI 90 LEDs with enhanced R9 value. Suitable for retail applications
- Suitable for ceiling mount only

Notes: Black and silver finishes or CRI 80 versions available to special order (minimum order quantity applies)

IP20 **Up to 92.6 LL/CW**

Specification

Mounting	**Surface**	IP rating	**IP20**

Lighting

Distribution	**30° beam** **38° beam**	Lumen output	**1,430 lm - 2,130 lm**
Efficacy	**Up to 92.6 LL/CW**		

Power

LED power	**14 W - 20 W**	Circuit power	**17 W - 23 W**

Zenith-M

Construction

Housing	**High pressure die-cast aluminium body with extruded aluminium gear enclosure**	Finish	**Full polyester powder coat**
Body colour	**Satin white**	Optical assembly	**High performance aluminium reflector with injection moulded anti-glare bezel**


LED characteristics

CRI	**90+**	Colour temperature	**3000 K** **4000 K**
Rated life (hours)	**50 K - L70/B10**	LED protection	**-**
Driver efficiency	**>80%**	Power factor	**>0.9**
MacAdam ellipse	**3 Step**	Flicker metric	**IEC TR 61547-1: PstLM ≤1.0 / SVM ≤0.4**

Compliance

UKCA	**Yes**	CE	**Yes**

Dimensions

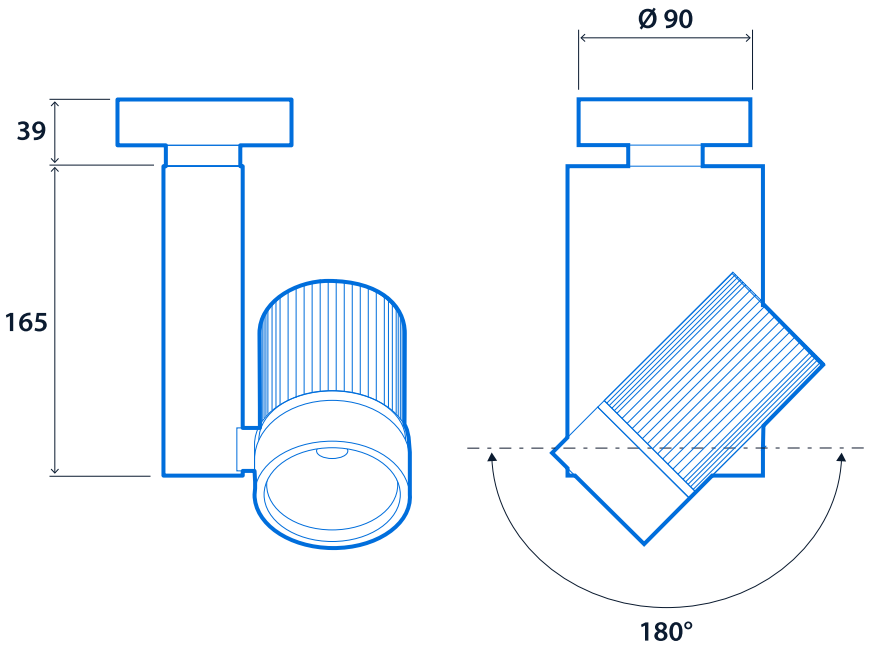

Range

Colour temperature	LED power	30° beam	38° beam	Lighting control system
3000 K	14 W	**ZEN18070**	**ZEN18074**	**A / L**
	20 W	**ZEN18071**	**ZEN18075**	**A / L**
4000 K	14 W	**ZEN18072**	**ZEN18076**	**A / L**
	20 W	**ZEN18073**	**ZEN18077**	**A / L**

Lighting control system - suffix catalogue number with **A** Dimming (DALI) / **L** Non-dimming
Hub version - suffix catalogue number with **SHL** (**Only** available with **L** control type)

E.g. **ZEN18070LSHL** = 3000 K / 14 W / 30° beam / Non-dimming / Hub version



Click or scan here

View Zenith-M variants using our online filtering tool



Information is correct as of 02-Nov-2026, however must not be interpreted as a guarantee of individual product performance and/or characteristics. We reserve the right to alter specifications and designs without prior notice.